



# DELIVERED WITH PRIDE

## YANDIYA GROUP LIMITED

Add: 1201 Tower B, Zhan Tao, Technology Building, Minzhi Avenue, Long Hua, Bao An, Shenzhen 518131 China  
Tel: 86-755-23303746 Fax: 86-755-86203626  
[sales@yandiya.com](mailto:sales@yandiya.com) [www.yandiya.com](http://www.yandiya.com)

### LED CEILING LIGHT



Product Name: 5W Ceiling Light

Issue Date: 2013-07-24

Quality Department	Engineer Department	Producer
Sam Zhang	Zhang yu wang	feng min Fu

#### ➤ Features of the products:

1. Low power consumption, High power efficiency
2. No UV or IR radiation
3. Beam angle: 30 degree
4. Brightness degradation: 3%-5%/kh
5. Products are compact of aluminum material
6. Superior thermal performance, high applicability
7. Environmental friendly: NO UV infrared and other radiation, shock vibration resistant
8. Imported light source ensure high brightness,
9. External constant-current driver, stable performance.
10. Color: white, warm white
11. Instant on, no warm up time required.

#### ➤ Application

LED Ceiling light / LED Down Light can be extensively applied to general lighting, such as mall, store, hotel, office, supermarket, commercial building, station, bus, warehouse, signage, residential, parking lot, home, restaurant, train, railway, subway station, bank, warehouse, exhibition gallery, library, closet, factory, cabinet, cupboard, kitchen, refrigeration units etc.



# DELIVERED WITH PRIDE

## YANDIYA GROUP LIMITED


Add: 1201 Tower B, Zhan Tao, Technology Building, Minzhi Avenue, Long Hua, Bao An, Shenzhen 518131 China  
Tel: 86-755-23303746 Fax: 86-755-86203626  
sales@yandiya.com www.yandiya.com

Replace conventional fluorescent lamp or sodium lamp. Energy efficient, environmentally friendly

### ➤ Main Specifications

Model No	YL-TH3W	YL-TH5W	YL-TH15W	YL-TH18W
Specifications	Φ92mm×51mm	Φ130mm×70mm	Φ170mm×73mm	Φ190mm×80mm
Net Weight	0.225kg	0.43kg	0.95kg	0.41kg
Input Voltage	AC 100V-240V 50Hz-60Hz			
Leds	3Leds	5Leds	15Leds	18Leds
Luminous Flux	270Lm	450Lm	1350Lm	1620Lm
Color Temperature	3000K-3500K(warm white)5500K-6500K(cold white)optional			
Color Rendering Index(Ra)	>80			
Single LED Specification	high power 1W			
Single LED Luminous Flux	>100LM			
Working Temperature	-20°C—50°C			
Lifespan	50,000Hours			

### ➤ Light Distribution Graph

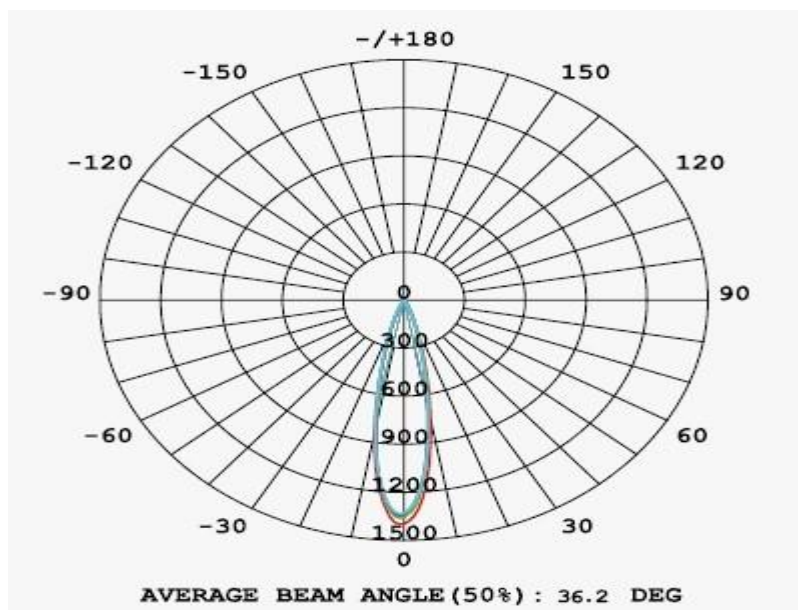



**DELIVERED WITH PRIDE**

**YANDIYA GROUP LIMITED**

Add: 1201 Tower B, Zhan Tao, Technology Building, Minzhi Avenue, Long Hua, Bao An, Shenzhen 518131 China

Tel: 86-755-23303746 Fax: 86-755-86203626

[sales@yandiya.com](mailto:sales@yandiya.com) [www.yandiya.com](http://www.yandiya.com)

---

➤ **Packing**

