



DELIVERED WITH PRIDE

YANDIYA GROUP LIMITED

Add: 1201 Tower B, Zhan Tao, Technology Building, Minzhi Avenue, Long Hua, Bao An, Shenzhen 518131 China
Tel: 86-755-23303746 Fax: 86-755-86203626
sales@yandiya.com www.yandiya.com

LED FLOOD LIGHT



Product Name: 30W Flood light

Issue Date: 2013-07-24

Quality Department	Engineer Department	Producer
Sam Zhang	Zhang yu wang	feng min Fu

➤ Features of the products:

1. Adopting integrated Chip as light source with high lighting efficiency (90-120Lm/W), High CRI (Ra>70), good quality heat dissipation, low light degradation.
2. Aluminum alloy die cast housing, good strength, high quality heat dissipation. Anti corrosion and baking varnish surface, can be for outdoor using.
3. Make a dedicated luminous intensity distribution design via the aluminum reflector, there are two options for lighting distribution, one is for focusing, another is for diffusing.
4. Wide Input Voltage from 100V~260VAC, constant voltage constant current output, can start up at once, no flicker, lightning protection, PFC function available.

➤ Applications:

LED wall washer lamp, LED flood light is particularly suitable for landscape, public square, metope and exhibit color washing. Through a variety of light and water combine to produce the feeling of smart to bring you a fantastic mood.



DELIVERED WITH PRIDE


YANDIYA GROUP LIMITED

Address: 1201 Tower B, Zhan Tao, Technology Building, Minzhi Avenue, Long Hua, Bao An, Shenzhen 518131 China
Tel: 86-755-23303746 Fax: 86-755-86203626
sales@yandiya.com www.yandiya.com


➤ Main Specifications

Model No.	YL-FL30W
Dimension	110*90*90mm
Power Consumption	30W
Tube Material	Aluminum
Weight	0.8 Kg
LED Quantity	1 pc
Luminous efficiency	90LM/W
Input Voltage	AC 85V - 265V
Work Frequency	50 TO 60Hz
Color Temperature	3000K-6000K
Viewing Angle(Degree)	120degree
Type of LED	Epistar
Environment temperature	-20 ~ +45
Environment Humidity	<95%
Color Rendering Index	>80%(White)
IP Level	65
Equal To The Brightness Of Metal halide lamp	60W
Luminous Flux(lm)	2700LM

➤ Light Distribution Graph

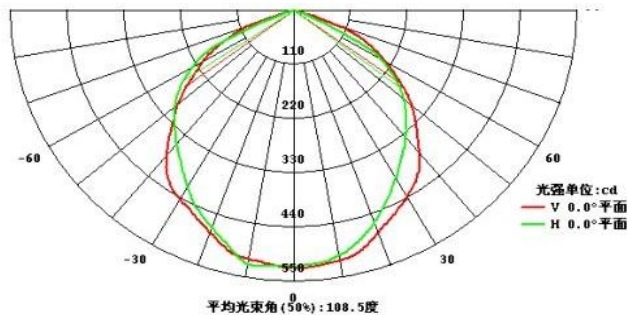

➤ Light Emitting Graph

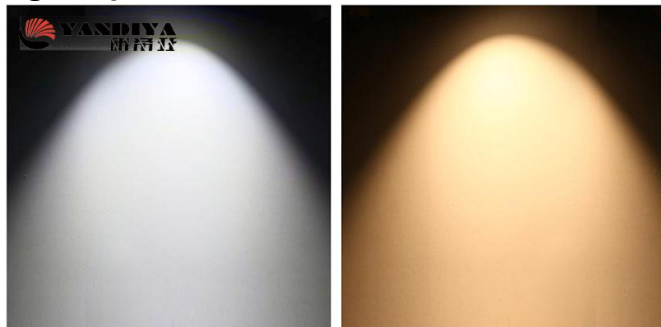




DELIVERED WITH PRIDE

YANDIYA GROUP LIMITED

Add: 1201 Tower B, Zhan Tao, Technology Building, Minzhi Avenue, Long Hua, Bao An, Shenzhen 518131 China
Tel: 86-755-23303746 Fax: 86-755-86203626
sales@yandiya.com www.yandiya.com

➤ **Product Dimensions:**

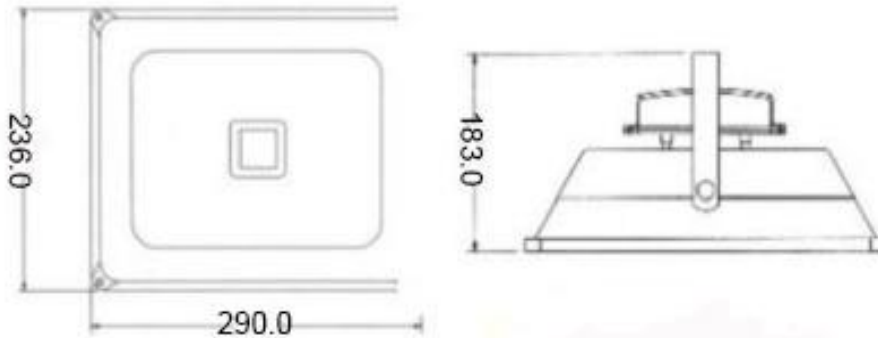

➤ **Notes:**

1. All dimension units are millimeters.
2. All dimension tolerance is $\pm 0.5\text{mm}$ unless otherwise noted